


Customer	*Product group	*Code	*Article number
Address		Customer No.	
Telephone	Telefax	Industry	
Contact person		Department	
<input type="checkbox"/> Pricing enquiry			
		Target price	Quantity
<input type="checkbox"/> Enquiry			
		*Enquiry No.	Annual requirement
<input type="checkbox"/> Order			
Delivery date			

## 1 Enclosure

- Standard
- Console enclosure, upper section
- Console enclosure, lower section



Anticipated installation weight \_\_\_\_\_ kg

## 2 Dimensions (mm) (always referred to the standard section)

### External enclosure dimensions

Width x height (W x H) \_\_\_\_\_ x \_\_\_\_\_

### Front panel dimensions (e x f)

\_\_\_\_\_ x \_\_\_\_\_


$e \times f = W - 40 \times H - 40$

### Rear panel dimensions W x H

\_\_\_\_\_ x \_\_\_\_\_

Screw-fixed rear panel:  $W \times H = W - 7 \times H - 7$

Hinged rear panel:  $W \times H = W - 9 \times H - 9$

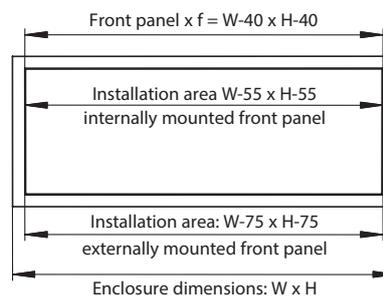

## 3 Front design (handle selection)




None




Bottom



Left + right



Left + right + bottom



All-round

(Important! The external enclosure dimensions increase by 16.5 mm on the side where a handle strip is selected)

## 4 Enclosure without door section

### Enclosure depth

External depth

120 mm

200 mm

### Front panel position

Installation depth

Internal  103 mm

External  111 mm

Internal  183 mm

External  191 mm

### Rear panel position

Screw-fixed or hinged

Screw-fixed

With standard hinge

With screw-mounted rear panel hinge

## 5 Enclosure with door section 55 (FP = Front panel, RP = Rear panel)

Front door

or  
External articulated hinges

Rear door

55 + 120

120 + 55

FP and RP internal

Installation depth 149 mm

FP internal and RP external

Installation depth 157 mm

FP external and RP internal

Installation depth 157 mm

FP and RP external

Installation depth 166 mm

55 + 200

200 + 55


Installation depth 229 mm

Installation depth 237 mm


Installation depth 237 mm

Installation depth 246 mm

## 6 Door mounting

 Left


or



or

 Right

## 7 Lock

 Square (mm):  6

 7

 **8 (Standard)**
 T-handle without lock

 Triangle (mm):  7

 8

 6,5 (CNOMO)

 T-handle with lock

 Two-way bit (mm):  3

 5

 E1 (without key)

 Daimler Benz: 
 Special lock/customer specification

 T-handle E1 (without key)

## 8 Front panel

 None

 With

 Without keyboard, 0°, without lock, 2HM

(2HE = 89 mm, 3HE = 134 mm)

19" Installation kit \_\_\_\_\_ Qty.

## 9 Rear panel

 None

 With

 Without keyboard, 20°, without lock, 3HM

 Clamping element for Simatic

 With keyboard, 0°, without lock, German, PS2, 2HM

 With keyboard, 20°, without lock, German, PS2, 3HM

 To customer specification (description under Point 14)

## 10 Partition (partition height 13 mm)

 Vertical

\_\_\_\_\_ Qty.

 Not mounted (standard)

 Mounted on right

 Mounted on left

 Horizontal

\_\_\_\_\_ Qty.

 unmounted (standard)

 Bottom mounted

 Top mounted

## 11 Partial front panels

 none

 1<sup>st</sup> operator panel: \_\_\_\_\_ Width x \_\_\_\_\_ Height

 Not mounted

 INTERNALLY mounted

 EXTERNALLY mounted

\_\_\_\_\_ (Art. No. BP)

 2<sup>nd</sup> operator panel: \_\_\_\_\_ Width x \_\_\_\_\_ Height

 Not mounted

 INTERNALLY mounted

 EXTERNALLY mounted

\_\_\_\_\_ (Art. No. BP)

## 12 Preparation for suspension system None

 Standard preparation (flange SL/CS-3000)

 Turn/tilt coupling

 Tilt adapter (only section 200)

 Flange coupling 80 (only section 200)

 Console connector

 Automotive adapter

 WS coupling


 CS-3000/48

 Special preparation to

customer specification (see below)

 Top

Side

 Bottom

 SS cover, top

 SS cover, bottom

## 13 Surface finish

Basic sections:

Door sections:

Corner modules/end caps:

Partition:

Front panels:

Rear panels:

### Standard

 Anodised, natural

 Anodised, natural

 RAL 9006, powder-coated

 Anodised, natural

 Anodised, natural

 Anodised, natural

### Customer specification

 \_\_\_\_\_

 \_\_\_\_\_

 \_\_\_\_\_

 \_\_\_\_\_

Article number FP: \_\_\_\_\_

Article number RW: \_\_\_\_\_

## 14 Accessories, Remarks (included in delivery specification: key (except E1 lock) and earthing kit)

 KDL 16/4

 KDL 24/5

 Grommet 3-4 mm

 Grommet 6-7 mm

 Dummy grommet

Only with automotive adapter or without SS preparation (KDL = cable gland strip)

\_\_\_\_\_ Qty.

\_\_\_\_\_ Qty.

\_\_\_\_\_ Qty.

Additionally: \_\_\_\_\_

 Annexes

Slsmn. \_\_\_\_\_ TAV \_\_\_\_\_ TAV \_\_\_\_\_

 No Annexes